

COTEK

CX-SERIES ADVANCED BATTERY CHARGER



CE

Table of Content

1. IMPORTANT SAFETY INFORMATION	2
1-1 General Safety Precautions	2
1-2 Battery Precautions	2
2. FEATURES.....	3
2-1 Battery Charging Curve.....	3
2-2 Specification.....	5
2-3 Mechanical Drawings	6
3. PRODUCT DESCRIPTION.....	10
3-1 Configurations	10
3-2 S1 Dip Switch Setting.....	11
3-3 Charging Status LED Indicator.....	11
3-4 Failure Indicator	12
3-5 Pin Assignment of CN2 – For Alarms Signal & Fan Control.....	12
3-6 Pin Assignment of CN3 – For Temperature sensor & Remote control	12
3-7 Pin Assignment of CN4 – For Remote control)	12
3-8 Pin Assignment of ESB Connectors - For CX1215/1225/1235)	13
3-9 Temperature Compensation	13
3-10 Rescue Battery Curve:	14
3-11 Battery Charger Selection (Reference only).....	14
3-12 Battery Voltage setting suggestion.....	15
4. INSTALLING THE COTEK ADVANCED CHARGER.....	15
4-1 Battery charger connection diagram	16
5. TROUBLE SHOOTING	19
6. WARRANTY STATEMENT	19

1. Important Safety Information



WARNING!

BEFORE INSTALLING OR USING CX-SERIES BATTERY CHARGER, YOU NEED TO READ FOLLOWING SAFETY INFORMATION CAREFULLY.

1-1 General Safety Precautions

- 1-1-1. For indoor use, do not expose CX-Series Battery Charger to water, mist, snow, or dust. To reduce the risk of fire, do not cover or obstruct the ventilation enclosure.
- 1-1-2. To avoid the risk of fire and electric shocks, make sure that existing wiring is in good electrical condition and not undersized.
- 1-1-3. Do not charge non-rechargeable batteries.
- 1-1-4. Disconnect the AC Grid before making or breaking the connections to the battery.
- 1-1-5. Only the AC cord with IEC socket is allowed to plug to the battery charger.
- 1-1-6. Never charge a frozen battery.
- 1-1-7. If the AC cord is damaged do not attempt to use. It must be replaced or repaired by a qualified person.
- 1-1-8. Corrosive substances may escape from the battery during charging and damage delicate surfaces. Please store and charge in a suitable area.


1-2 Battery Precautions

- 1-2-1. If battery acid contacts your skin or clothing, wash it out with soap and water immediately.
- 1-2-2. If battery acid contacts your eyes, wash it out with cold running water for at least 20 minutes and get medical attention immediately.
- 1-2-3. Never smoke or make a spark or flame in the vicinity of the battery or the engine.
- 1-2-4. Do not drop metals on the battery.
The resulting sparks or short-circuits on the battery or other electrical parts may cause an explosion.
- 1-2-5. Remove personal metal items such as rings, bracelets, necklaces, and watches when operating with lead-acid batteries. It may cause short circuit and very high temperature, which can melt metal items.

2. Features

- Universal AC input with active PFC
- Compatible with Lead Acid, Li-ion, Gel and AGM batteries
- Support remote controller CR-1 as optional accessory.
- Voltage / temperature compensation
- 2 stage fan speed control (Sleep mode)
- Output power OK signal
- Output alarm signal
- High efficiency and high reliability
- Built-in battery rescue function
- Built-in Engine Start Battery (ESB) output function
- Protection Short Circuit / Over Voltage / Over Temperature / Brown-out Protection
- Withstand 2G vibration test

2-1 Battery Charging Curve

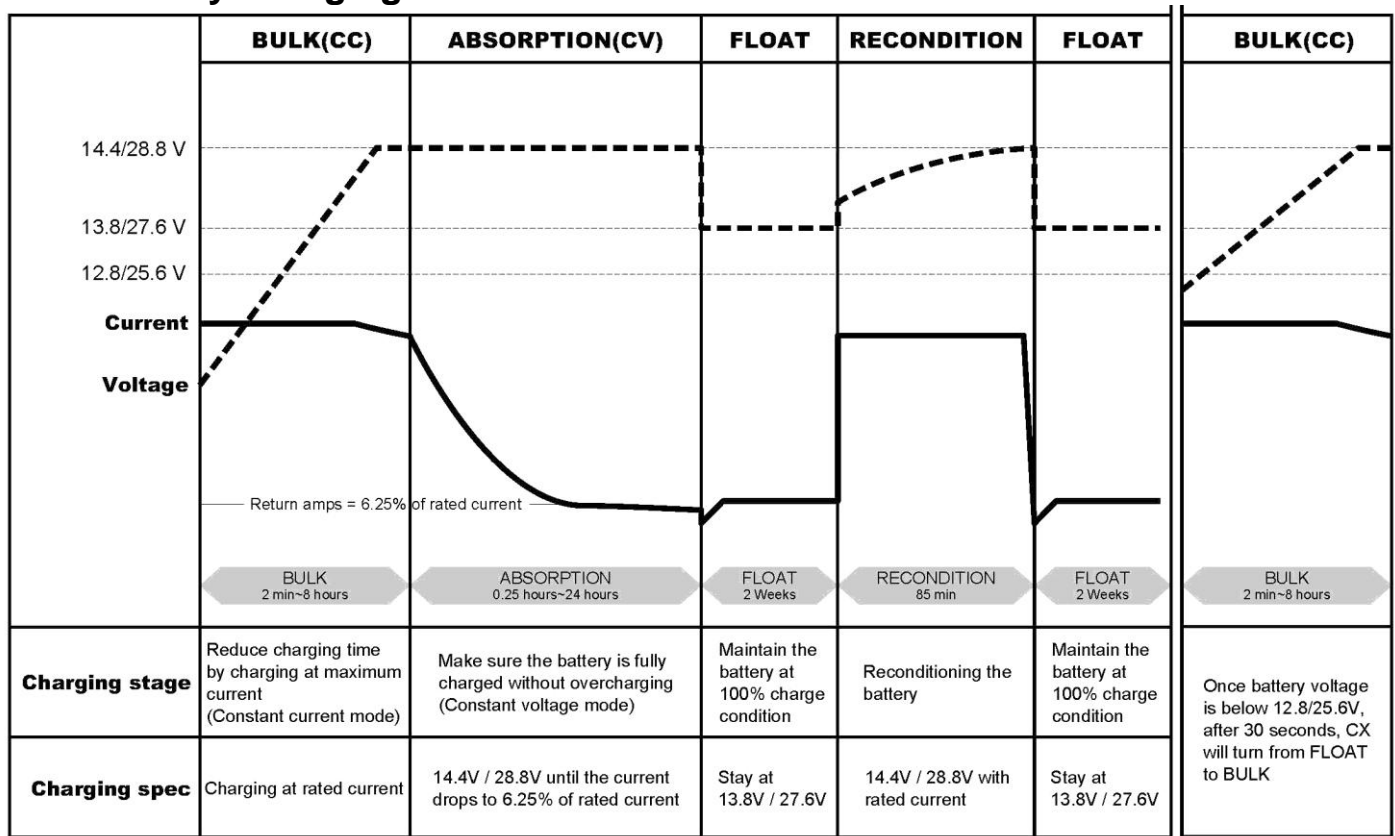

2-1-1 Bulk Stage (Constant Current)

At the beginning of the charging process, the flat battery is charged at constant current (maximum charge current) until the battery voltage reaches the set charging voltage (Refer to 3-2 charging mode setting).

2-1-2 Absorption Stage (Constant Voltage)

The absorption charging duration will depend on the battery status.

Before moving to absorption stage, charger will wait for two minutes then charging at constant voltage until the battery is fully charged.

Once the battery is fully charged or the charging current is below 6.25% of the rated charging current for 15 minutes, then the absorption stage ends.

2-1-3 Float Stage

After absorption stage, the battery charger switches to float stage, maintains the battery at 100% charge without overcharging or damaging the battery. This means the charger can be left connected to the battery continuously.

2-1-4 Recondition stage

Every 12 days, the battery charger switches back to Bulk stage for 85 minutes in order to revive the battery. This prevents any fatigue symptoms such as sulphation.


2-2 Specification

Model		CX1215	CX1225	CX1235	CX1250	CX1280	CX2415	CX2425	CX2440
Output	Battery Type	Lead Acid / Li-ion / Gel / AGM							
	Standard Boost Charge Voltage	14.4V / 14.7V (Select by S1 DIP switch)					28.8V / 29.4V (Select by S1 DIP switch)		
	Standard Float Charge Voltage	13.8V / 13.5V (Select by S1 DIP switch)					27.6V / 27V (Select by S1 DIP switch)		
	Main Rated Current	15A	25A	35A	50A	80A	12.5A	25A	40A
	Main Output	1	2	2	3	3	2	3	3
	ESB Output	1	1	1	--	--	--	--	--
	ESB Output Voltage / Current	13.8V/2A	13.8V/2A	13.8V/2A	--	--	--	--	--
	Battery Charging Mode	3-stage charging capability IUOU							
	Isolation Type	Use active power MOSFET on each output terminal							
	Single Output Current Limit	15A	25A	35A	40A	40A	12.5A	25A	40A
Input	Voltage Range	90~264VAC							
	Frequency Range	47~63Hz							
	Power Factor (Typ.)	PF > 0.92 at full load							
	Efficiency (Typ.) at 230Vac	87%	87%	87%	87%	87%	90%	90%	90%
Protection	Short Circuit	Current is reduced to < 1A continued 30sec., will operate 30 seconds then turn off							
	Over Voltage	17.5V ±1%, protection type: shut down output (recovery after resetting AC power ON)					35V ±1%, protection type: shut down output (recovery after resetting AC power ON)		
	Over Temperature	Charger Over Temperature 100 ±5℃ detected by heat sink							
		52±5℃ (Optional temperature sensor)							
		Auto recovery after heat sink temperature goes down to 50±5℃							
Function	Alarm Signal	NC. / NO. Relay contact output (Please reference Alarms signal & Fan control)							
	Temperature Compensation	-10mv / 0.5℃ with COTEK temperature sensor							
	Sleep Mode	By Remote Controller and S1-4 DIP switch (Please refer to section 3-2)							
	Remote Controller	Support COTEK Remote Controller CR-1 (Please refer to section 3-6 and 3-7)							
Environment	Working Temp.	-20~50℃ (refer to output load de-rating curve)							
	Working Humidity	20~90% RH non-condensing							
	Temp. Coefficient	±0.03% (0~50℃)							
	Vibration	10~500Hz, 2G 10min. / 1cycle period for 60min. each along X, Y, Z axes.							
Safety & EMC	Safety Standards	Certified EN 60335-1, EN60335-2-29							
	Withstand Voltage	I/P-O/P: 4242VDC, I/P-FG: 1768VDC, O/P-FG: 700VDC							
	Isolation Resistance	I/P-O/P: 100M Ohms / 500VDC							
	EMI Conduction & Radiation	EN 55022; EN 55024; EN 61204-3; EN 55014-1; EN 55014-2							
	Harmonic Current	EN 61000-3-2; EN 61000-3-3; EN 61204-3; EN 61000-6-1; EN 61000-6-3							
	EMS Immunity	IEC 61000-4-2, 3, 4, 5, 6, 8, 11; ENV 50204							
Others	Dimension (WxHxD) (Unit: mm)	183x72x243.4		183x72 x263.4	213x76.5 x272.4	213x76.5 x312.4	183x72 x243.4	213x76.5 x272.4	213x76.5 x312.4
	Packing (Unit: kg)	1.6	1.7	1.9	3.1	4.0	1.6	2.9	3.9



2-3 Mechanical Drawings

Model: CX1215/1225/1235/2415




Unit: mm

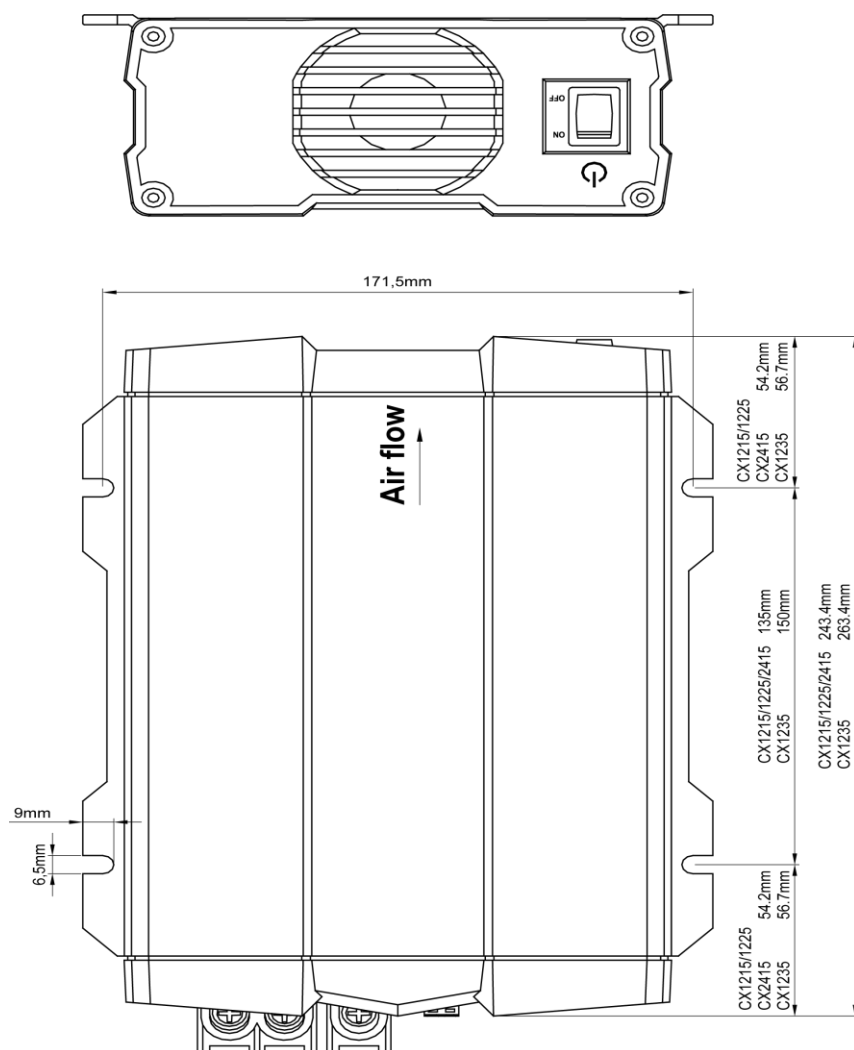


CX1225 / 1235 / 2415

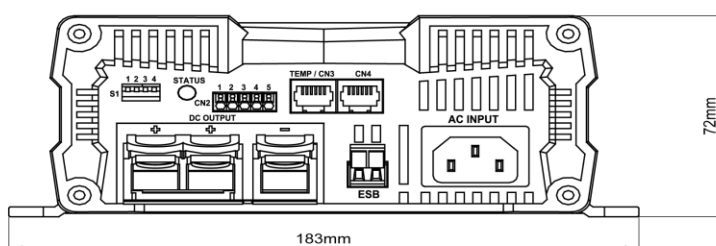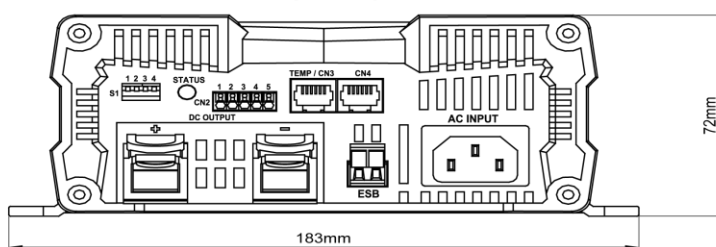**CX1215**

Model: CX1250/1280/2425/2440
Unit: mm

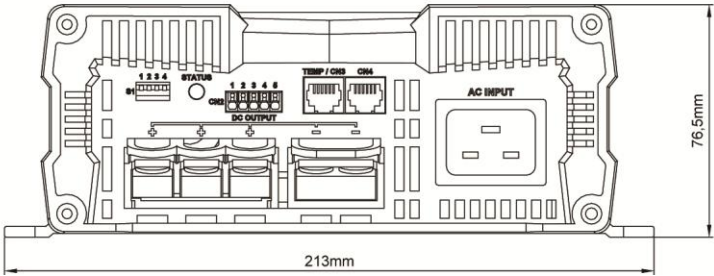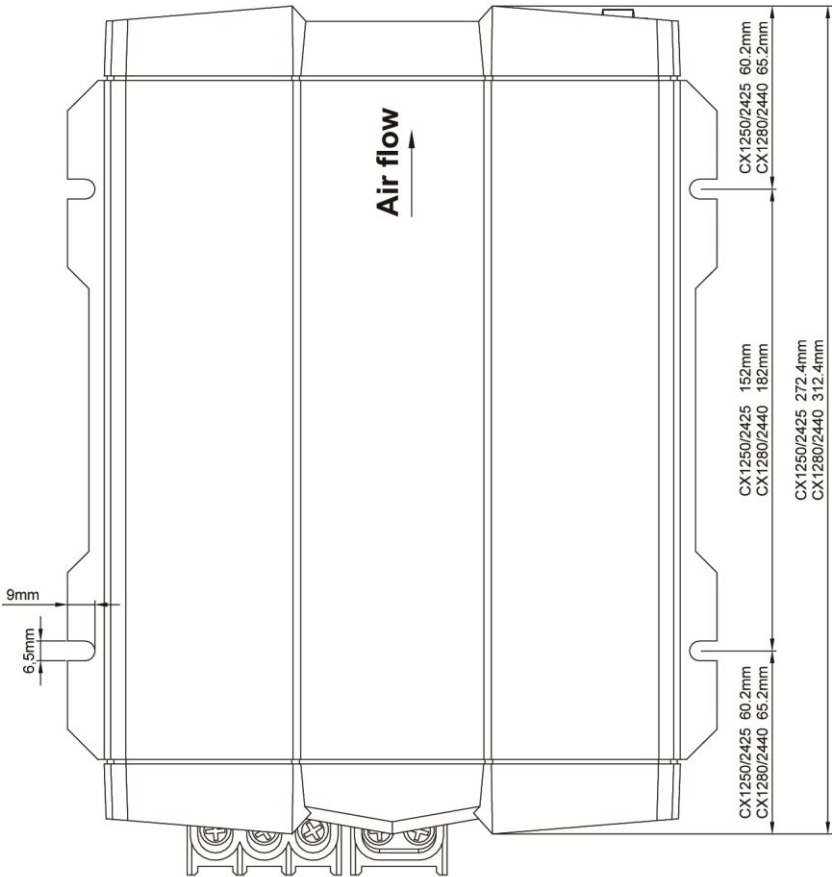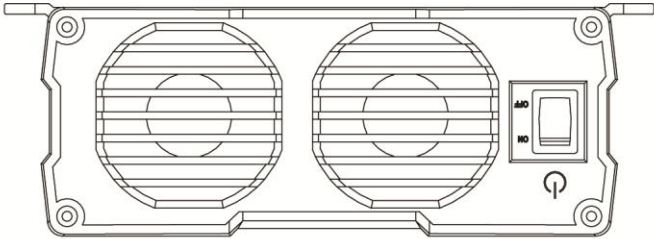


2-3-1 CX1215/1225/1235/2415 (Front Panel)

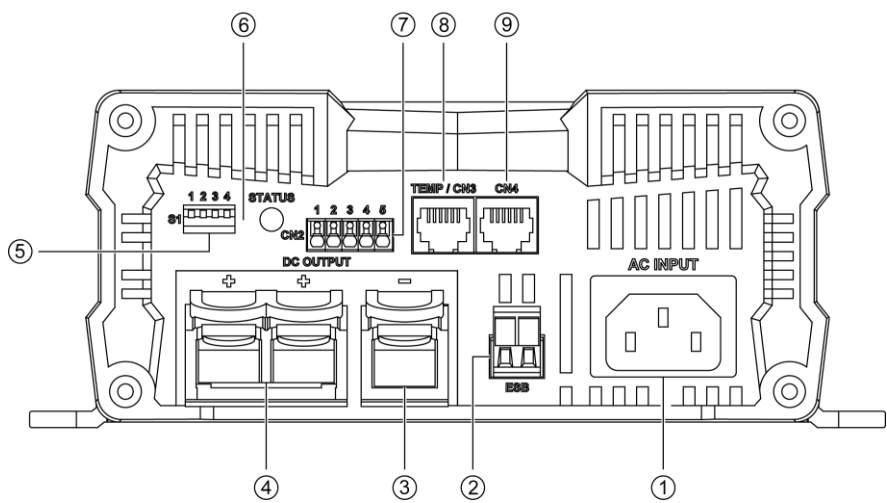

Front panel			
①	AC Inlet (IEC)	⑥	Status LED
②	ESB connector	⑦	CN2
③	DC output -	⑧	TEMP/CN3
④	DC output +	⑨	CN4
⑤	Dip Switch 1 (S1)		


Note: For detail description on item 5 (Dip Switch S1), please refer to section 3-2

2-3-2 CX1215/1225/1235/2415 (Rear Panel)

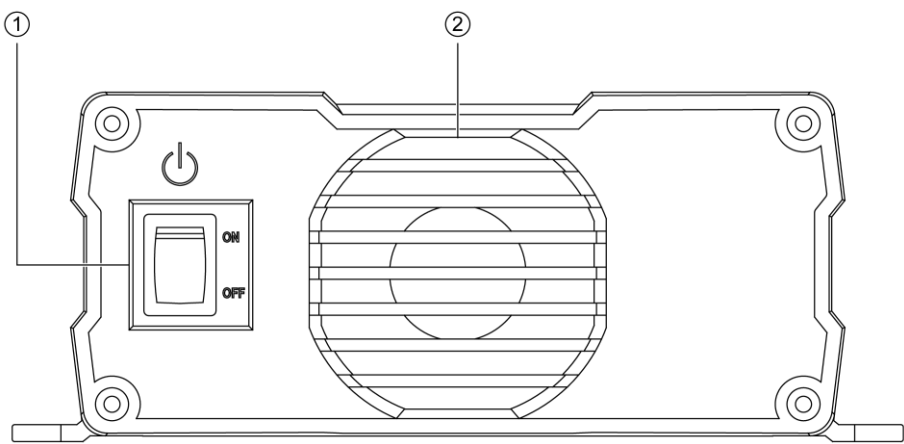

Rear panel			
①	Power Switch	②	Fan


2-3-3 CX1250/1280/2425/2440 (Front Panel)

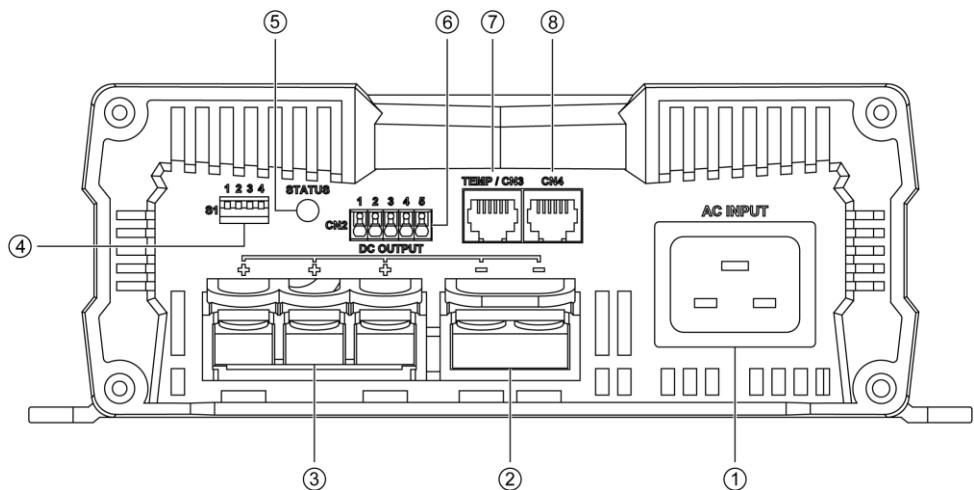

Front panel			
①	AC Inlet (IEC)	⑤	Status LED
②	DC output -	⑥	CN2
③	DC output +	⑦	TEMP/CN3
④	Dip Switch 1 (S1)	⑧	CN4

Note: For detail description on item 4 (Dip Switch S1), please refer to section 3-2

2-3-4 CX1250/1280/2425/2440 (Rear Panel)

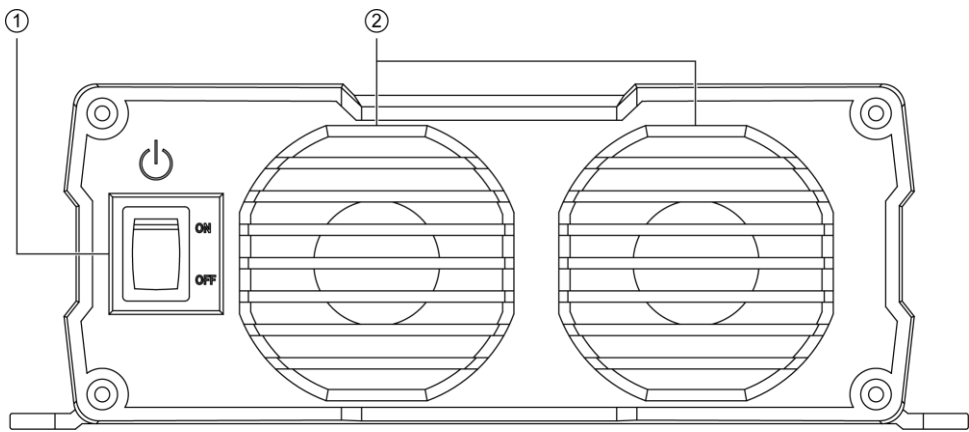

Rear panel			
①	Power Switch	②	Fan





3. Product Description

Below models are available with COTEK Advanced Battery Charger CX Series:

Model	No. of supply battery	Support ESB (Engine Start battery)
CX1215	1	Yes
CX1225 /CX1235	2	Yes
CX1250 /CX1280	3	No
CX2415	2	No
CX2425 /CX2440	3	No




3-1 Configurations

3-1-1 Standard Accessory

Number	A	B	C	D
Description	Copper Bus		Screw	AC Power Cable
Diagram				


Quantity per	CX1215	CX1225	CX1235	CX1250	CX1280	CX2415	CX2425	CX2440
A	x	1pcs	1pcs	x	x	1pcs	x	x
B	x	x	x	1pcs	1pcs	x	1pcs	1pcs
C	x	2pcs	2pcs	3pcs	3pcs	2pcs	3pcs	3pcs
D	1pcs	1pcs	1pcs	1pcs	1pcs	1pcs	1pcs	1pcs

3-1-2 Optional Accessory

Number	A	B	C
Description	Ring Terminal	Battery Temp Sensor	Remote
Diagram			

Number	CX1215	CX1225	CX1235	CX1250	CX1280	CX2415	CX2425	CX2440
A	2pcs	3pcs	3pcs	5pcs	5pcs	3pcs	5pcs	5pcs
B	1pcs	1pcs	1pcs	1pcs	1pcs	1pcs	1pcs	1pcs
C	1pcs	1pcs	1pcs	1pcs	1pcs	1pcs	1pcs	1pcs

3-2 S1 Dip Switch Setting

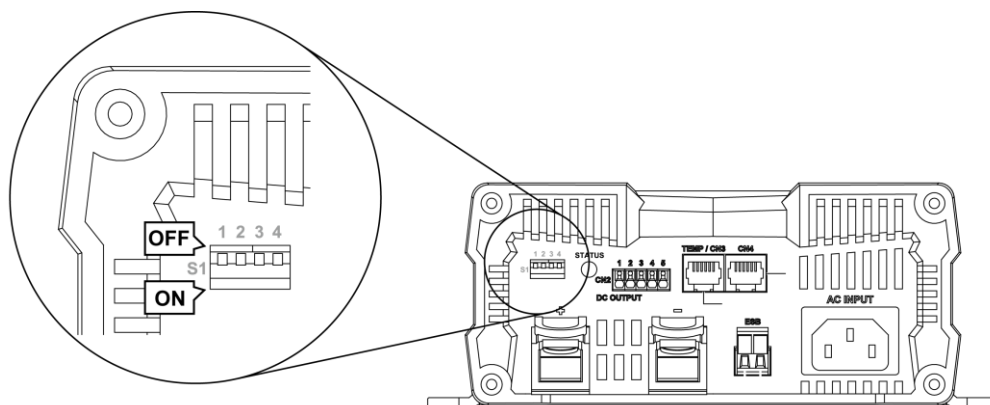

Status	1	2	3	4	12V / 24V CC/CV	12V / 24V Float
CC turn to CV voltage	ON	X	OFF	X	14.4V / 28.8V	---
	OFF	X	OFF	X	14.7V / 29.4V	---
Float voltage	X	ON	OFF	X	---	13.5V / 27.0V
	X	OFF	OFF	X	---	13.8V / 27.6V
Power Mode (Current limit output voltage)	OFF	OFF	ON	X	13.2V / 26.4V	
	OFF	ON	ON	X	13.8V / 27.6V	
	ON	OFF	ON	X	14.4V / 28.8V	
Remote	ON	ON	ON	X	---	---
Fan force ON/OFF	X	X	X	ON	---	---
	X	X	X	OFF	---	---

X: Not Applicable

---: By Default setting

3-2-1 Default setting

Model	12V Series	24V Series
CC/CV	14.4V	28.8V
Float	13.8V	27.6V
Power Mode	Off	Off
Remote	Off	Off
Fan	Full Speed	Full Speed


3-3 Charging Status LED Indicator

Charging status	LED Status	
Bulk-1	Orange fast	-----
Bulk-2	Orange slow	- - - - -
Absorption-1	Orange solid	=====
Absorption-2	Green solid	=====
Float	Green flash
	LED color change by the status change	

3-4 Failure Indicator


Failure status	LED Status		Description
Input or Output	Red solid	—————	Output current is reduced to <1A
			AC I/P unstable
			Output FUSE blown
Temperature	Red fast	-----	Battery over heat (the indicator is available only when COTEK temperature sensor is connected)
			Battery under heat (the indicator is available only when COTEK temperature sensor is connected)
			Charger over heat (Heat Sink)
Battery voltage	Red slow	- - - - -	Battery over voltage
			Battery under voltage or output under voltage in C.C. mode.
Fan abnormality	Red light flash twice	- - - - -	Fan abnormality
ESB Failure	Red light slow ones	-----	ESB no output / output short

3-5 Pin Assignment of CN2 – For Alarms Signal & Fan Control


1	Normally closed	
2	Normally open	
3	COM	
4	Sleep mode control	
5	GND	

4-5 Short	Sleep mode on
4-5 Open	Sleep mode off

3-6 Pin Assignment of CN3 – For Temperature sensor & Remote control

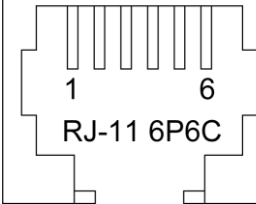1	R_VCC	
2	GND	
3	TEMP	
4	BAT-	
5	DATA I/O	
6	BAT+	

3-7 Pin Assignment of CN4 – For Remote control)

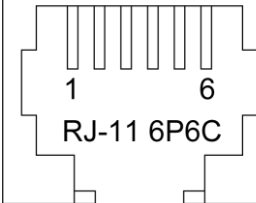
1	R_VCC	
2	BAT-	
3	NC.	
4	BAT-	
5	DATA I/O	
6	BAT+	

3-8 Pin Assignment of ESB Connectors - For CX1215/1225/1235)

+	VCC	
-	GND	


3-9 Temperature Compensation

■ CX12xx Series model

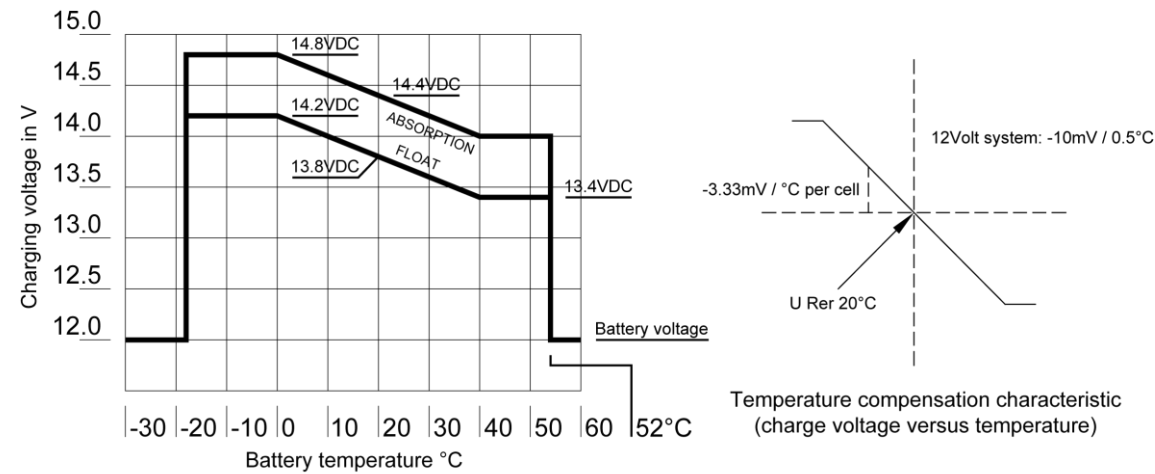

※ In the CV=14.4V and float=13.8V situation. Please follow this rule in other situations.


■ CX24xx Series model

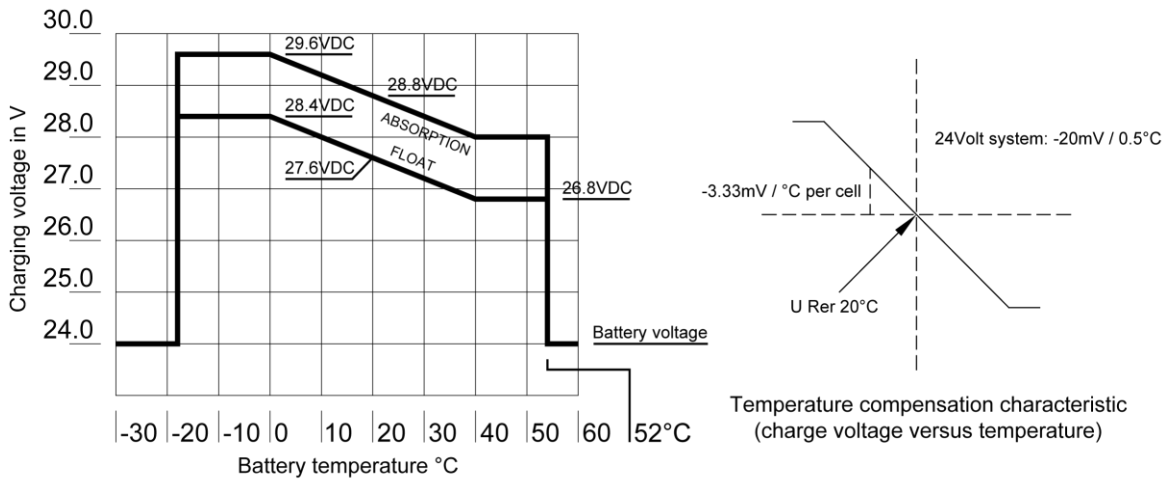

※ In the CV=28.8V and float=27.6V situation. Please follow this rule in other situations.

3-10 Rescue Battery Curve:

In case of battery over discharge (when battery voltage lower than 10V), CX battery charger will reduce the charging current to prevent further damage on the battery. The following curve is only applicable for Lead-acid & AGM battery.

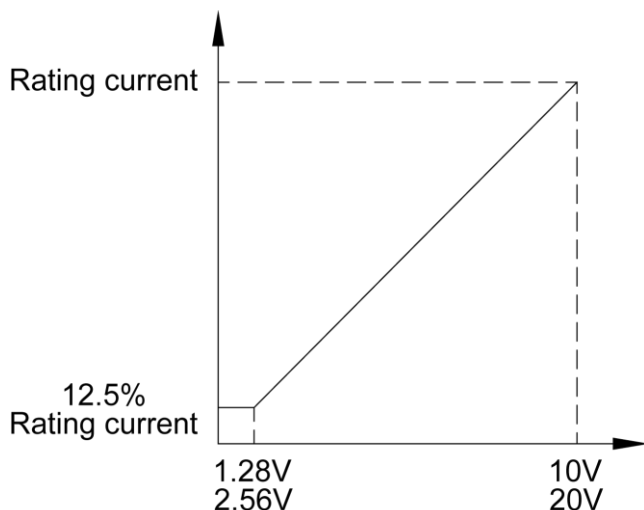

3-11 Battery Charger Selection (Reference only)

◆ 12 Volt Battery

COTEK Model	Battery capacity range	Estimated charging time
CX1215	50~80Ah	6~24
CX1225	80~125Ah	6~24
CX1235	125~175Ah	6~24
CX1250	175~250Ah	6~24
CX1280	250~400Ah	6~24

The above suggested battery charger selection is based on battery capacity multiply 0.2~0.3. Example: 100Ah battery * 0.2 / 0.3 = 20A~30A in this case please select CX1225.

◆ 24 Volt Battery

COTEK Model	Battery capacity range	Estimated charging time
CX2415	50~80Ah	6~24
CX2425	80~125Ah	6~24
CX2440	125~200Ah	6~24

The above suggested battery charger selection is based on battery capacity multiply 0.2~0.3. Example: 100Ah battery * 0.2 / 0.3 = 20A~30A in this case please select CX2425.

3-12 Battery Voltage setting suggestion

- ◆ GEL TYPE (Max. Voltage of 14.1 / 28.2 Volt)
- ◆ AGM TYPE (Max. Voltage of 14.4 / 28.8 Volt)
- ◆ Lead-Acid (Max. Voltage of 14.8 / 29.6 Volt)


4. Installing the COTEK Advanced Charger

When selecting the installation location, observe the following instructions:


- The battery charger can be installed horizontally or vertically.
- Do not install the charger in following situations:
 - In wet environment
 - In dusty environment
 - In the vicinity of combustible materials
 - In areas where there is a danger of explosions
- The place of installation must be well ventilated. A ventilation system must be available for installation in small, enclosed space. The clearance around the device must be at least 25cm.
- The charger must be installed on a level and sufficiently sturdy surface.
- Do not install the charger above batteries, because they can emit corrosive sulphur fumes that will damage the device.
- For ambient temperatures higher than 40 °C (such as in engine or heating compartments, or direct sunlight), the heat from the charger under load can lead to reduced output.
- The air inlet on the underside and the air outlet on the back of charger must remain clear.


4-1 Battery charger connection diagram

Model: CX1215

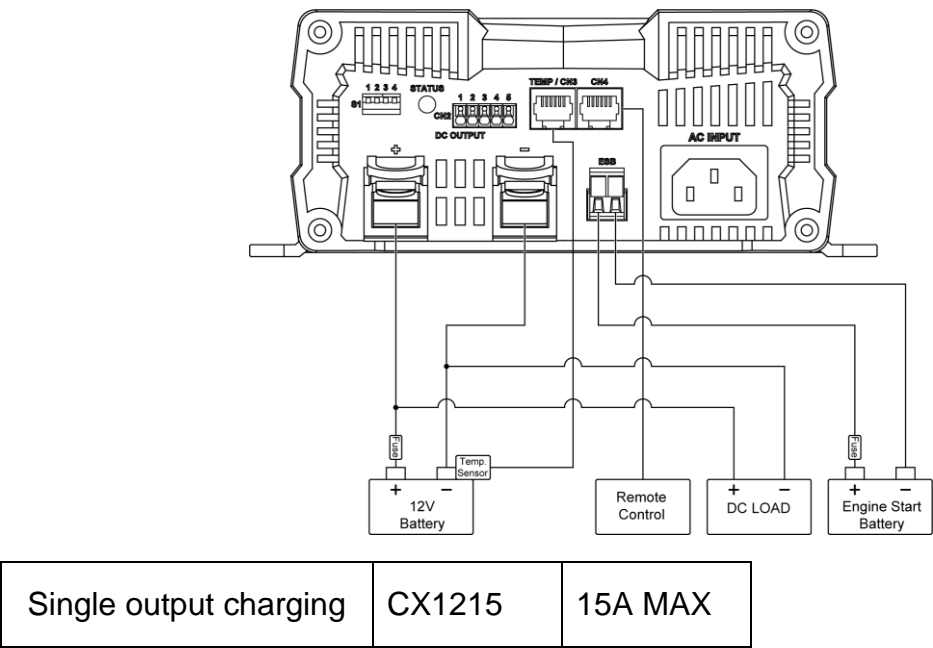


Model: CX1225/CX1235/2415

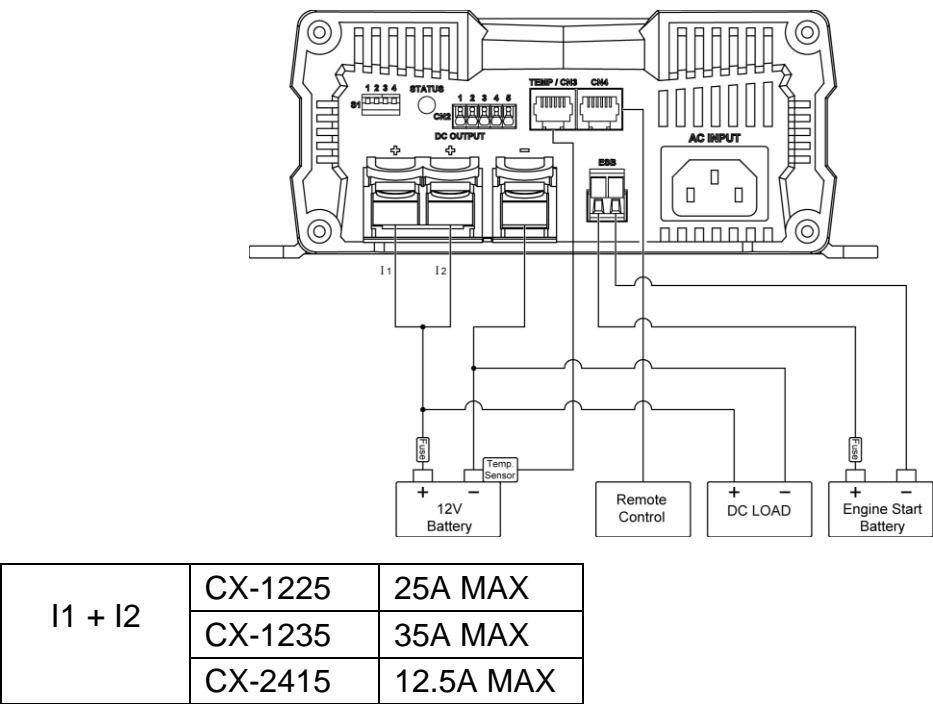

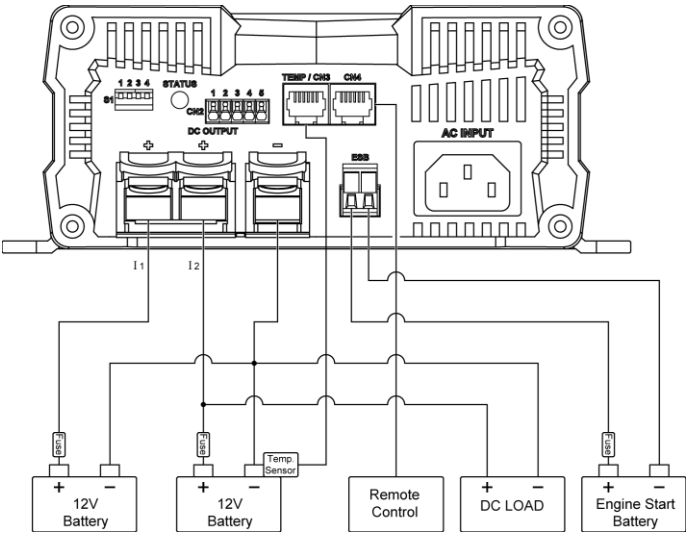


I1 or I2	CX-1225	25A MAX
	CX-1235	35A MAX
	CX-2415	12.5A MAX

Model: CX1250/CX1280/2425/2440

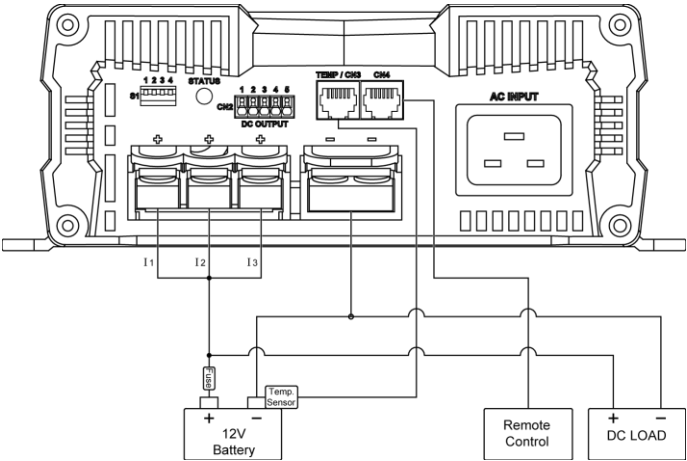


I1+I2+I3	CX-1250	50A MAX
	CX-1280	80A MAX
	CX-2425	25A MAX
	CX-2440	40A MAX

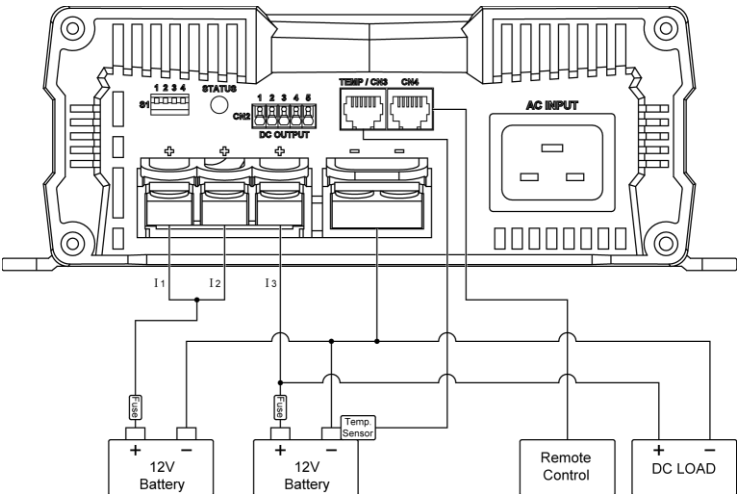

I1+I2	CX-1250	50A MAX
	CX-1280	80A MAX
	CX-2425	25A MAX
	CX-2440	40A MAX

I3 Single output charging	CX-1250	40A MAX
	CX-1280	40A MAX
	CX-2425	25A MAX
	CX-2440	40A MAX

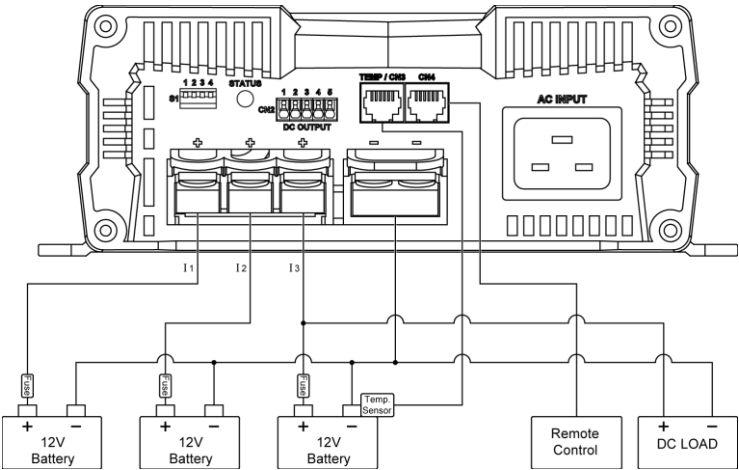

Single output charging	CX-1250	40A MAX
	CX-1280	40A MAX
	CX-2425	25A MAX
	CX-2440	40A MAX

5. Trouble Shooting

LED display	Cause	Remedy
Red, slowly flashing	Battery under voltage or battery overload	Check the battery. Switch the battery charger off and on again.
	Defective battery	Replace the battery
	Overheating	Improve the ventilation of the battery charger or battery. Make sure that no ventilation openings are covered. If necessary, reduce the ambient temperature.
Red, permanently lit	Short circuit or reversed polarity	Connect the battery charger with the correct polarity. Rectify the short circuit. Check if the fuse has blown and replace it if necessary.
Red, double flash	Fan fault	Check the fan for dirt or damage.
Red, slow double flash	Fault at the starter battery connection	Check the starter battery connection for a short circuit.

6. Warranty Statement

We guarantee this product against defects in materials and workmanship for a period of 24 months from the date of purchase. Please contact your local COTEK authorized distributor for RMA (Return material Authorization) service. Please note that COTEK is only responsible for ensuring our products are operational before delivery. This warranty will be considered void if the unit has been misused, altered, or accidentally damaged. COTEK is not liable for anything that occurs as a result of the user's fault.

COTEK

No. 33, Sec. 2, Renhe Rd., Daxi Township, Taoyuan County 33548, Taiwan

Phone : +886-3-3891999 FAX : +886-3-3802333

http : // www.cotek.com.tw

Update: 2014.07